


ASSEMBLY/DISASSEMBLY

(Your saddle Hautacam is already assembled when you receive it)

Proust saddle exploded view

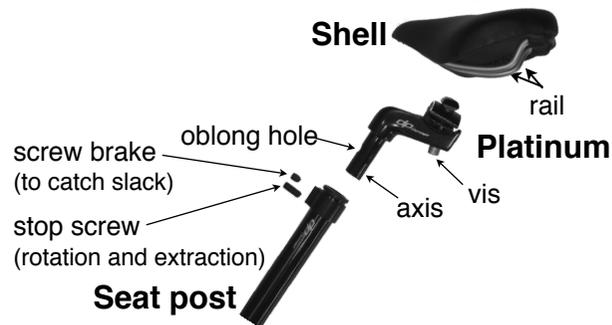

① Insert platinum in seat post :

With an allen key, unscrew the stop screw, this allows insert platinum.



- 
- Insert platinum as picture (the stop screw has to enter in the oblong hole).
 - Screw the stop screw until it is completely in the seat post. This screw enter in the platinum oblong hole.
 - You can adjust harder of pivot, tightening less or more the screw brake.

② Fixing shell on the platinum :

- Unscrew the screw under platinum without disassemble all parts of it.



- Insert the shell and screw.



Adjustment of the shell : you can advance, back or tilt the shell. Ideally, the shell must be assembled back as much as possible, and inclined (5 degrees minimum).



Seat in the Proust Saddle

(Hautacam Universal DP 2.2 and Perthus Absolute Comfort DP 1.2)

General principles :

- In any position on the handlebar and climbing a hill, there is no contact with genital part or perineum. Hands on the handlebar you have to feel good on the Proust Saddle.
- Saddle follows the natural movement of the pelvis and so, pivots.
- The pivot must be as free as possible, with a sweet movement.

Saddle height adjusting (picture 1) :

- Setting on the saddle, on ischia (= pelvis bones), hands on the handlebar, with the more usual position.
- In socks, put heel on the pedal (the more down). The leg has to be stretch and heel brushing against pedal.
- This is a setting basic. You have to setting according to you, your thickness shoe.



• **If «slipping» in advance** (too extended position) :

- Raise handlebar or
- Shorten the stem (sometime you can turn over it)

• **If ischia ache** (overheating because of rubbing) :

- Lower the saddle.
- See pantie or short seam.
- Change inclination.

• **If ischia ache for only one ischia** (leg more short or different ossification) :

- Put saddle to the height leg more short.
- Change saddle inclination for different ossification.
- If the problem persists, put a slipcover Proust Saddle, or bandage like «Compeed», or choose Dolomite Universal DP 3.2.

Maintenance :

When pivoting begins to «paste», to be hard, to make noise (creaking) : disassemble platinum, unscrew the stop screw. Clean up old grease on axis, in the seat post and parts in contact, with grease remover. Put a bit new grease and assemble.

!! Don't carry your bike by the saddle. You spoil your longevity saddle.